

# GEN II DOOR CONVERSION FIELD SURVEY WORKSHEET



MEASURE DATE	MAP NUMBER
JOB NAME	
SITE ADDRESS	
CITY/STATE	
ZIP	
INSTALL DATE	
CONTACT NAME	
CONTACT PHONE	
FIELD TECHNICIAN	

AP25	STARFIRE
AP375	CLEAR
AP375BR	BRONZE
AP75	SATIN
AP100	LOW-E
AP125	LOW IRON
RG1	SB60
RG2	SB90
RG3	NO BUG
RG4	
RG5	
RG6	
RG7	

DOOR MFR. \_\_\_\_\_ MAKE \_\_\_\_\_

MODEL \_\_\_\_\_

### ALUMINUM FRAMED GLASS DOOR FIELD MEASUREMENTS

- Door Frames must be 1-3/4" deep to accept door conversion.
- Do not measure glazing beads/stops. Frame-to-frame only.
- Both interior and exterior glazing stops **MUST** be removable.

DOOR WITH MUNTIN DIVIDER  
TOP SECTION WIDTH AND HEIGHT

**A** \_\_\_\_\_ **B** \_\_\_\_\_

WIDTH HEIGHT

DOOR WITH MUNTIN DIVIDER  
BOTTOM SECTION WIDTH AND HEIGHT

**A** \_\_\_\_\_ **C** \_\_\_\_\_


WIDTH HEIGHT

NO MUNTIN DIVIDER  
SINGLE PANEL DOOR WIDTH HEIGHT

**A** \_\_\_\_\_ **D** \_\_\_\_\_

WIDTH HEIGHT

ALUMINUM FRAMED DOOR - EXTERIOR VIEW

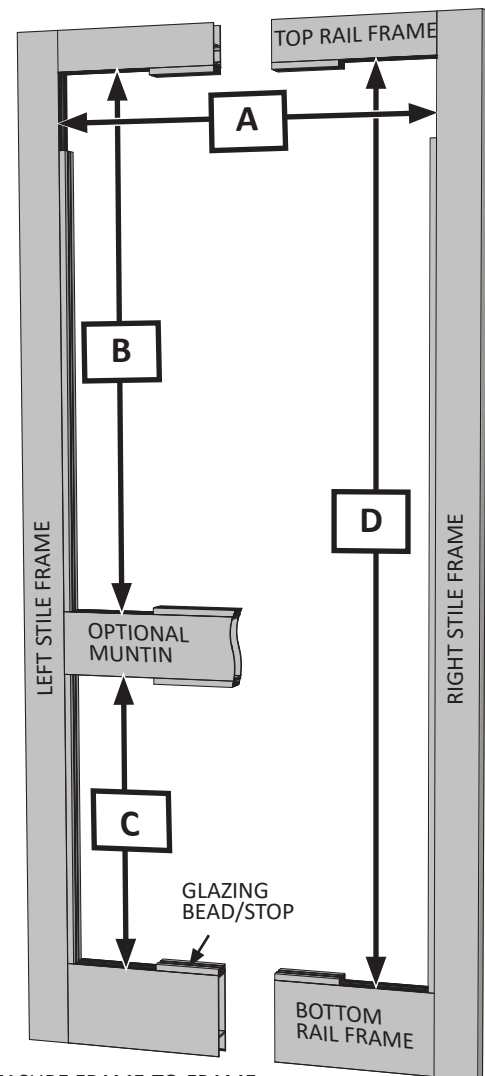

MEASURE FRAME-TO-FRAME  
**NOT** STOP-TO-STOP